

Copyright © 2015 by Academic Publishing House Researcher



Published in the Russian Federation
European Journal of Technology and Design
Has been issued since 2013.

ISSN: 2308-6505

E-ISSN: 2310-3450

Vol. 8, Is. 2, pp. 52-55, 2015

DOI: 10.13187/ejtd.2015.8.52

www.ejournal4.com

UDC 621

Investigation of Dynamics of Nano Fluid

¹ Abbas Salimi Fard^{2*} Farshad Farahbod

¹ Islamic Azad University, Sirjan, Iran
Department of Chemical Engineering, Sirjan Branch
E-mail: abbas.salimifard@yahoo.com

² Islamic Azad University, Firoozabad, Fars, Iran
Department of Chemical Engineering, Firoozabad branch

* E-mail: mf_fcbe@iauf.ac.ir

Abstract

Experimental work is held to investigate how nanoparticle affects the hydrodynamic properties of the fluid. Nano zinc oxide particles with different diameters using different time duration with ultrasonic method are produced. Thermal conductivity enhancement, changes in viscosity, heat capacity, shear rate and density of nanofluid are compared with those in water base fluid.

Keywords: dynamics, nano fluid, density, viscosity.

Introduction

In recent years, development in the miniaturization technologies results in fabrication of micro-scale electronic devices which is used in various industries such as aerospace and automotive. For maximum performance of these micro devices which is known as MEMS (Micro Electromechanical Systems), the temperatures should be in a certain range. Microchannel [1] as Compact and efficient cooling devices have been developed for the thermal control of MEMS. Utilizing nanofluid as working fluid could improve the cooling and heating performance. Because of more stable nature of nanofluid compared with its pioneer generation (including micro and millimeter particles) and exceptional thermal conductivity of nanoparticles, it could considerably enhance the convective heat transfer coefficient in microchannel. During the last decade, many studies on convective heat transfer with nanofluids have been considered [2-6]. Pak and Cho [2] revealed that the heat transfer coefficients of the nanofluids increase with increasing the volume fraction of nanoparticles and the Reynolds number. Mirmasoumi and Behzadmehr [7] studied the laminar mixed convection of an Al₂O₃/water nanofluid in a horizontal tube numerically using a two-phase mixture model. They showed that the nanoparticle concentration did not have significant effects on the hydrodynamics parameters, but its effects on the thermal parameters were important for the fully developed region. Izadi et al. [8] considered the laminar forced convection of an Al₂O₃ /water nanofluid flowing in an annulus. Their results indicate that the friction coefficient depends on the nanoparticle concentration when the order of magnitude of heating energy is much higher than the momentum energy. Thermal transport of nanofluid flow in microchannels has also attracted a few investigators [9-15] due to its promising applications. In a

study by Jang et al [11] the cooling performance of the microchannel was significantly improved by the significant reduction in the temperature difference between the heated wall and the nanofluids. Ho et al. [12] experimentally assessed forced convective cooling and heating performance of a copper microchannel heat sink with Al_2O_3 /water nanofluid as a coolant. Their results show that the nanofluid cooled heat sink outperforms the water-cooled one, having significantly higher average heat transfer coefficient and thereby markedly lower thermal resistance and wall temperature at high pumping power, in particular. Meanwhile, in an experiment [14] using SiO_2 -water nanofluids in an aluminum heat sink consisted of an array of 4 mm diameter circular channels with a length of 40 mm. The experimental results showed that dispersing Al_2O_3 and SiO_2 nanoparticles in water significantly increased the overall heat transfer coefficient while thermal resistance of heat sink was decreased up to 10%. Also they numerically investigated corresponding configuration. The results revealed that channel diameter, as well as heat sink height and number of channels in a heat sink have significant effects on the maximum temperature of heat sink. Regarding numerical aspects, Kosar [16] demonstrated when the commonly used assumption of constant heat flux boundary condition is applicable in heat and fluid flow analysis in microfluidic systems. Also a general Nusselt number correlation for fully developed laminar flow was developed as a function of two dimensionless parameters, namely, Biot number and relative conductivity, to take the conduction effects of the solid substrate on heat transfer into account. Kalteh et al. [17] numerically and experimentally studied the thermal characteristics of an alumina-water nanofluid flow inside a wide rectangular microchannel. In their study, a two-phase method was adopted. Their comparison shows that two-phase modeling results have better concordance with experimental data than the homogeneous (single-phase) approach. Few researches on characteristics of nanofluids which experimentally behave as non-Newtonian have been performed. For example Hojjat et al. [18] prepared three kinds of nanofluids by dispersing gAl_2O_3 , CuO , ZnO and TiO_2 nanoparticles in a solution of carboxymethyl cellulose (CMC). They proposed a new correlation to predict successfully the Nusselt number of non-Newtonian nanofluids as a function of the Reynolds and the Prandtl numbers. In most of the cases, heat transfer in microchannels is connected with conduction effects of substrate. Most of researches are performed regardless the substrate material and thickness under the assumption of constant heat flux boundary condition. For cases where thick and low thermal conductivity (such as polymers) substrates are utilized commonly used constant heat flux boundary condition may not be valid. Thus many researchers have been performed studies on single-phase flow in micro-heat sinks to investigate their thermal performances and the conjugate effects [19]. This paper aims to consider the hydrodynamic and thermal properties of the Al_2O_3 and ZnO nano fluid in a channel. According to the literature [20–25], in micro scale systems, large channel length to hydraulic diameter ratios bring about large velocity and as a result thermal energy generation due to viscous dissipation effects. Thus, this paper studied some attributes of nanofluids flow performance in the above described configuration.

Experimental set up

After preparing nanoparticle in two steps process, the determined amount of nano particle is fed into the experimental set up to prepare nanofluid and experiments running.

Results and Discussion

The effect of the time of ultra-sonic on the synthesized nano particles

Figure 1 illustrates the size of produced nano particles versus time of ultra-sonic. According to this Figure the size of produced nano particles is decreasing versus increasing the time of ultra-sonic. The increasing the time can broke the structure of macro molecule.

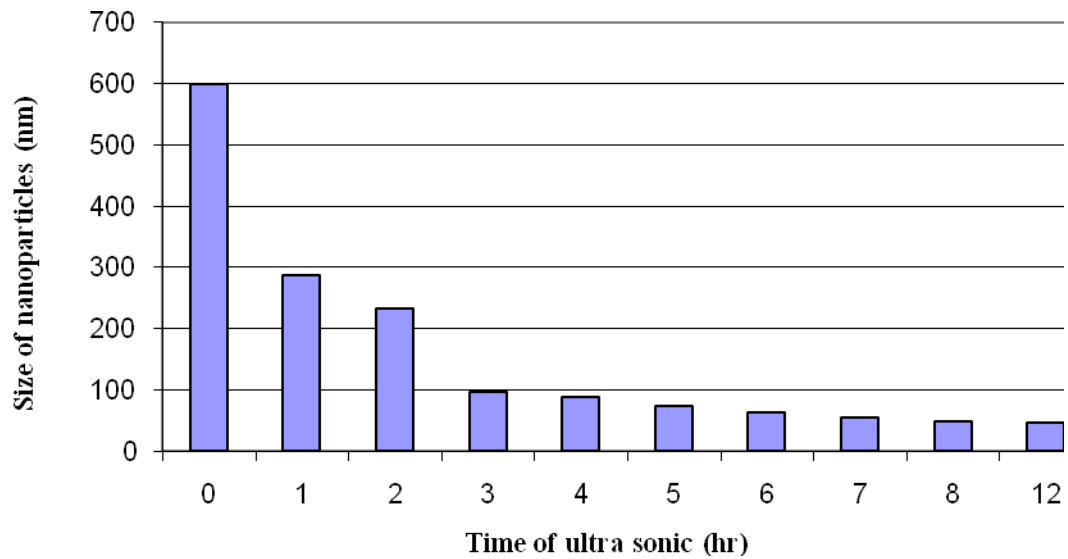


Figure 1. Size of particle versus time of ultrasonic.

Average Temperature and average velocity distribution

Figure 2 shows the temperature changes through the pipe with different amounts of nanoparticles. Also, this Figure compares the experimental data with the calculated data from the mathematical model. The increase in the amount of nanoparticle increases the average temperature of nanofluid at the constant heat flux. This is clearly due to the increase in the amount of thermal conductivity and also heat of capacity of the fluid. The decreasing trend of temperature is obtained through the non adiabatic tube.

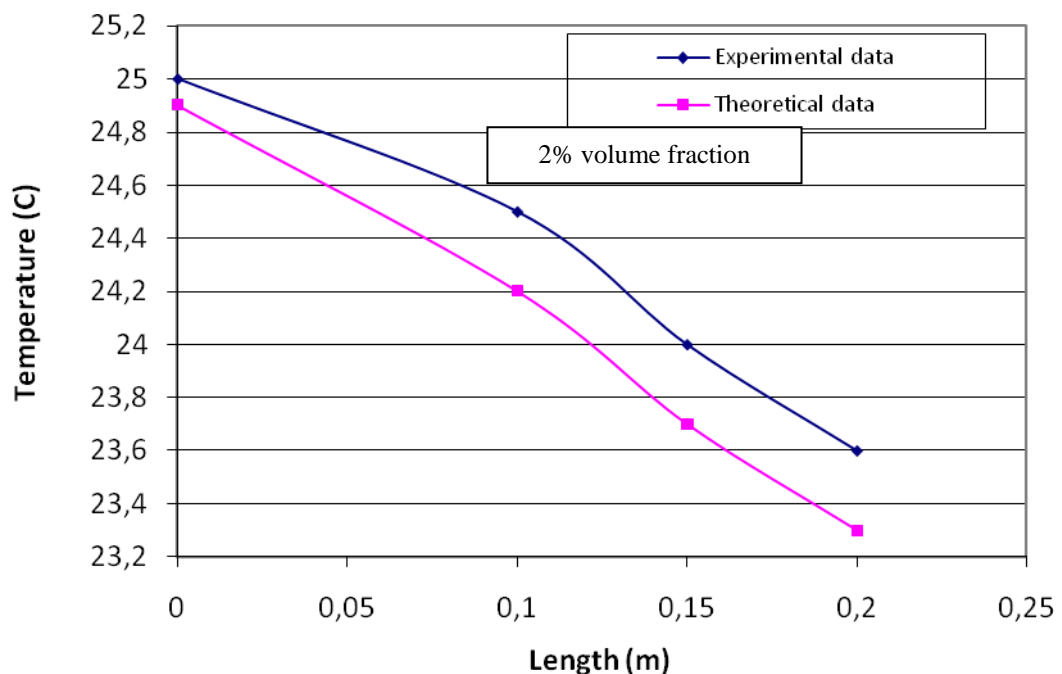


Figure 2. Average temperature versus length (2 % volume fraction nanoparticle).

Conclusions

This work investigates the effect of nanoparticles on the rheological parameters of fluid, experimentally and mathematically. Experiments are held to measure the viscosity, shear rate, shear stress, heat of capacity, density and enhancement in amount of thermal conductivity of nano fluid in a pipe with 0.025 m and 0.2 m in diameter and length, respectively.

References:

1. N. Bhuwakietkumjohn, S. Rittidech, Internal flow patterns on heat transfer characteristics of a closed-loop oscillating heat-pipe with check valves using ethanol and a silver nano-ethanol mixture, *Exp. Therm. Fluid Sci.* 34 (2010) 1000-1007.
2. T. Cho, I. Baek, J. Lee, S. Park, Preparation of nano-fluids containing suspended silver particles for enhancing fluid thermal conductivity of fluids, *J. Industrial Eng. Chem.* 11 (2005) 400-406.
3. Pavel Ferkl, Richard Pokorný, Marek Bobák, Juraj Kosek, Heat transfer in one-dimensional micro- and nano-cellular foams, *Chem. Eng. Sci.* 97 (2013) 50-58.
4. S.P. Jang, S.U.S. Choi, Role of Brownian motion in the enhanced thermal conductivity of nanofluids, *Appl. Phys. Letter.* 84 (2004) 4316-4318.
5. A.E. Kabeel, El. Maaty T. Abou, Y.El. Samadony, The effect of using nano-particles on corrugated plate heat exchanger performance, *Appl. Therm. Eng.* 52 (2013) 221-229.
6. S. Nadeem, Rashid Mehmood, Noreen Sher Akbar, Non-orthogonal stagnation point flow of a nano non-Newtonian fluid towards a stretching surface with heat transfer International, *J. Heat Mass Trans.* 57 (2013) 679-689.
7. Hamid Reza Taghiyari, Effects of Nano-Silver and Nano-Zycosil on Mechanical Strength of Heat, Vapor, and Dry-Ice-Treated Biscuit and Dovetail Medium-Density Fiberboard Miter Joints, *Mat. Des.* 51 (2013) 695-700.
8. X. Wang, J. Xian, L. Hai, L. Xin, W. Fang, F. Zhou, L. Fang, Stability of TiO₂ and Al₂O₃ nanofluids, *Chin. Phys. Letter.* 28 (2011) 086601.
9. W.C. Wei, S.H. Tsai, S.Y. Yang, S.W. Kang, Effect of nano-fluid on heat pipe thermal performance, in: *Proceedings of the 3rd IASME/ WSEAS International Conference on Heat Transfer, Therm. Eng. Environ.* 2 (2005a) 115-117.
10. W.C. Wei, S.H. Tsai, S.Y. Yang, S.W. Kang, Effect of nano-fluid concentration on heat pipe thermal performance, *IASME Trans.* 2 (2005b) 1432-1439.